AX-RA-02A

Damper Actuator, Modulating, 2Nm



Product Overview

The AX-RA-02A modulating damper actuators are designed for dampers in ventilation and air-conditioning systems. These 24Vac/dc & 230Vac operated actuators comes with one auxiliary SPDT switch.

The 2Nm damper actuators AX-RA-02 with selectable control signal of 0(2)-10V or 0(4)-20mA are used to regulate dampers up to approx. 0.5m².



Product Features

- Manual control button available in casing.
- Self Overload Protection

- Mechanical limit operator
- CE Compliant

Product Specifications

Torque: 2NmDamper size: $0.5m^2$ Running time: 30 Sec

Power supply: AC/DC 24V 50/60Hz OR AC 100-240V 50/60Hz

Nominal voltage range: 24Vac (AC/DC 19.2V-28.8V), 230Vac (AC 85V-265V)

Power consumption: Runtime: 3W. Holding: 0.5W

Angle of rotation: 0-90° (Mechanical Adjustment Option)

Direction Of Rotation: L/R Switch
Life cycle: 60,000 cycles

Control Signals: 0(2)-10V or 0(4)-20mA (Selectable)

Auxiliary switch: 1x SPDT

Auxiliary switch rating: 3(1.5)Amp, 230V

Sound power level, motor: 45dB Ingress protection: IP54

Ambient temperature: -20°C to 50°C Storage temperature: -30°C to 80°C

Humidity Test: 95 % RH (Non Condensing)

Unit Weight: 0.5 Kg
Shaft Length: >50mm
Compliance: CE
Country Of Origin: UK

Order Codes

Part Number Description

AX-RA-02A Damper Actuator, Modulating 24V, 2Nm, 0(2)-10V/0(4)-20mA


AX-RA-02A-S Damper Actuator, Modulating 24V, 2Nm, 0(2)-10V/0(4)-20mA, 1 Aux switch


* Add suffix "-230" for 230Vac versions


Damper Actuator, Modulating, 2Nm




Dimensions (mm)

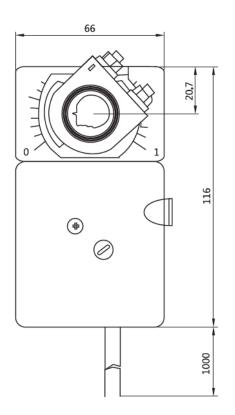

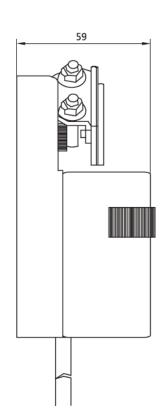


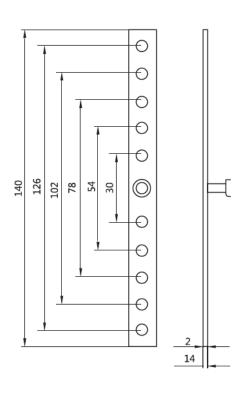

Wiring Diagram (24V)

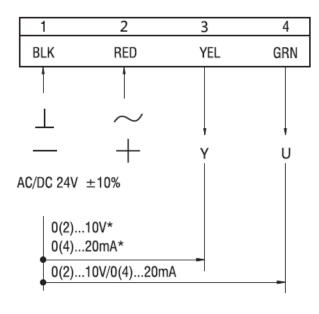


Wiring Diagram (230V)

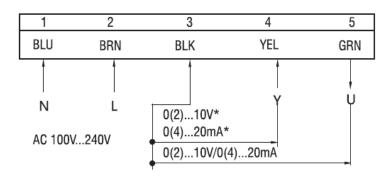

Damper Actuator, Modulating, 2Nm



Auxiliary Switch

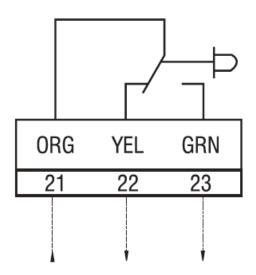

Control Switch Settings

No 1: Mode of feedback signal	No 2: Control of starting signal	No 3: Mode of control signal	Factory setting
ON 1 2 3 4	ON	ON 1 2 3 4	ON DE LE
OFF: voltage signal	OFF: 0-10V or 0-20mA;	OFF: voltage signal	1 2 3 4
0(2)-10V feedback;	011:0 10 v 01 0 2011/v t,	0(2)-10V input;	
ON 1234	ON 1 2 3 4	ON 1 2 3 4	Input: 010V;
ON: current signal	ON 0.40V/ 4.00 4	ON: current signal	Feedback: 010V.
0(4)-20mA feedback.	ON: 2-10V or 4-20mA	0(4)-20mA input.	(No 4: Undefined.)

Datasheet Contents

Every effort has been taken in the production of this data sheet to ensure accuracy. Axio do not accept responsibility for any damage, expense, injury, loss or consequential loss resulting from any errors or omissions. Axio has a policy of continuous improvement and reserves the right to change this specification without notice.