

# AX-LCD-1

LCD Voltmeter Display on Single Gang Plate

# AXIO



## Product overview

The AX-LCD-1 range of units feature a high-contrast, blue backlit liquid crystal display with white text. Various options are available such that the 0-10V input can be used to display a variety of ranges and units of measurement.. The displays fit a standard single gang back-box.

## Features

- Blue LCD Display with 19mm height characters
- 0-10V input range
- Fits standard single gang deep back box
- 24Vac or dc supply

## Product specifications

Power Supply	24Vac/24Vdc ( $\pm 10\%$ ) at 30mA
Input	0-10Vdc, 1mA maximum
Display	Blue LCD Display with 19mm height characters
Enclosure	Single gang white thermoset plastic
Terminals	2-part rising clamp for 0.5-1.5mm <sup>2</sup> cable
Weight & Dimensions	85gms, 85 x 85 x 35mm (approx)
Backbox Depth	45mm
Ambient Temperature	0°C to 60°C
Country of Origin	United Kingdom

Order Online at:

[www.annicom.com](http://www.annicom.com)

Email orders and enquiries to:

[Sales@annicom.com](mailto:Sales@annicom.com)

## Order codes

AX-LCD-1-rru Dual LCD Display - use the codes below to determine the range (r) and display unit (u)

Range rr	No decimal point	Range rr	With decimal point	Display Units u	
10	-9.9 to 40.0	40	-99 to 99	C	°C
11	0.0 to 40.0	41	-40 to 60	P	Pa
12	0.0 to 50.0	42	-10 to 40	R	%RH
13	0.0 to 70.0	43	0 to 100	V	V
14	0.0 to 99.0	44	0 to 200	N	No units
		45	0 to 500		
		46	0 to 999		

For example, AX-LCD-1-10C is an LCD voltmeter Display with a display range of -9.9°C to 40.0°C

© Copyright Annicom 2019. All Rights Reserved


# AX-LCD-1

## LCD Voltmeter Display on Single Gang Plate

### Installation

The AX-LCD-1 should be installed by a suitably qualified technician in conjunction with any guidelines for the equipment it is to be connected to and any local regulations. Field wiring should be installed to satisfy the requirements set out by the manufacturer of the equipment that the module is being connected to.

### Connections

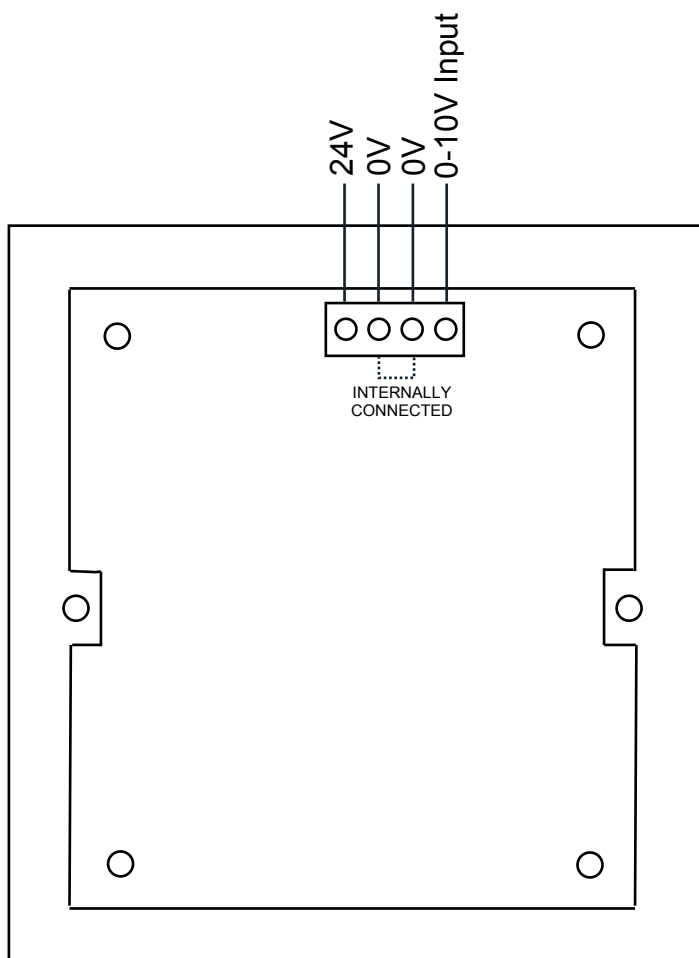

Every effort has been taken in the production of this data sheet to ensure accuracy. Axio do not accept responsibility for any damage, expense, injury, loss or consequential loss resulting from any errors or omissions. Axio has a policy of continuous improvement and reserves the right to change this specification without notice.