

2 Pole 2PDT Relay Sockets


ESC18F-2Z-C4




Parameters

- Rated Voltage: 250Vac
- Rated Current: 12A
- Insulation Voltage: $\geq 3KV$
- Socket Material: PA66+GF (V1/V0)
- Contact Spring Material: QSn6.5-01

Drawing

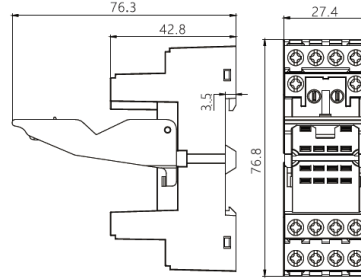

Wiring




ESC18F-2Z-C5




Parameters

- Rated Voltage: 250Vac
- Rated Current: 10A
- Insulation Voltage: $\geq 3KV$
- Socket Material: PA66+GF (V1/V0)
- Contact Spring Material: QSn6.5-01

Drawing

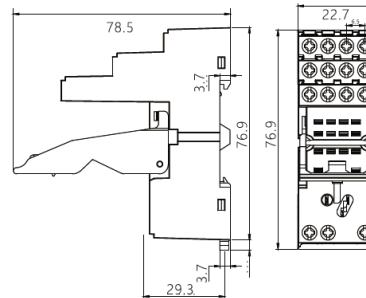

Wiring




ESC18F-2Z-SL




Parameters

- Rated Voltage: 300Vac
- Rated Current: 12A
- Insulation Voltage: $\geq 3KV$
- Socket Material: PA66+GF (V1/V0)
- Contact Spring Material: QSn6.5-01

Drawing

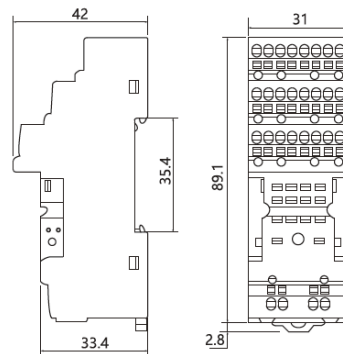

Wiring



ESC18F-2C



Parameters

- Matching Sockets: C4, C5, SL
- Relay Height: 36mm
- Relay Type: 2PDT

4 Pole 4PDT Relay Sockets


ESC18F-4Z-C4




Parameters

Rated Voltage: 250Vac
 Rated Current: 8A
 Insulation Voltage: $\geq 3KV$
 Socket Material: PA66+GF (V1/V0)
 Contact Spring Material: QSn6.5-01

Drawing

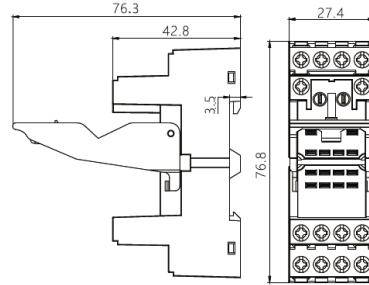

Wiring




ESC18F-4Z-C5




Parameters

Rated Voltage: 250Vac
 Rated Current: 8A
 Insulation Voltage: $\geq 3KV$
 Socket Material: PA66+GF (V1/V0)
 Contact Spring Material: QSn6.5-01

Drawing

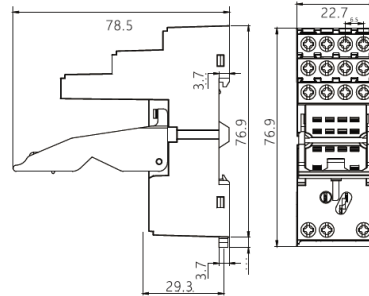

Wiring




ESC18F-4Z-SL




Parameters

Rated Voltage: 300Vac
 Rated Current: 7A
 Insulation Voltage: $\geq 3KV$
 Socket Material: PA66+GF (V1/V0)
 Contact Spring Material: QSn6.5-01

Drawing

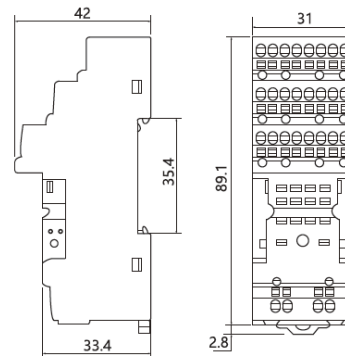

Wiring



ESC18F-4C



Parameters

Matching Sockets: C4, C5, SL
 Relay Height: 36mm
 Relay Type: 2PDT

Datasheet Contents

Every effort has been taken in the production of this data sheet to ensure accuracy. Annicom do not accept responsibility for any damage, expense, injury, loss or consequential loss resulting from any errors or omissions. Annicom has a policy of continuous improvement and reserves the right to change this specification without notice.